LTECH



2 4G LED Color Temperature Controller

Main Characteristics

V2 RF CT Remote Control

Remote Option:	СТ
Working Voltage:	3Vdc (Battery CR2032)
Wireless Frequency:	2.4GHz
Working Temperature:	-30 ~55
Package Size:	L150×W46×H18(mm)
Weight(G.W.):	85g



R4-3A CV Receiver

R4-5A CV Receiver

Working Temperature: -30 ~55

Note: Receiver is sold separately.

Input Voltage:

Package Size: Weight(G.W.):

Dimensions

Max Current Load:

Max Output Power:

Input Voltage:	5~24Vdc
Max Current Load:	3A × 4CH Max. 12A
Max Output Power:	60W/144W/288W(5V/12V/24V)
Working Temperature:	-30 ~55
Package Size:	L127×W35×H24(mm)
Weight(G.W.):	60g

5~24Vdc

150g


5A × 4CH Max, 20A 100W/240W/480W(5V/12V/24V)

L178×W48×H33(mm)

R4-3A R4-5A/R4-CC

R4-CC CC Receiver

Input Voltage:	12~48Vdc
Output Voltage:	3~46Vdc
Output Current:	CC 350/700/1050mA×4CH
Output Power:	1.05W~48.3W×4CH Max 193.2W
Working Temperature:	-30 ~55
Package Size:	L178×W48×H33(mm)
Weight(G.W.):	165g

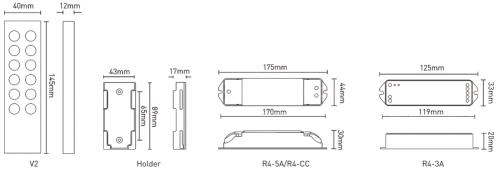


www.ltech-led.com

1






Operating Instruction for Remote:



Operating Instruction for Receiver:

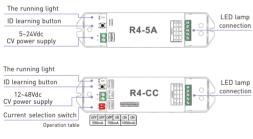

Wiring Diagram :







Match code:



Press the hottom

keeps on

Match/Clear code between remotes



Then press any key on A in 5 seconds. When the indicator light of B turns off. match successfully.

Clear code




Press the bottom two keys of B simultaneously (about 6 seconds), the indicator light keeps on, deactivated matching successfully.

Match/Clear code between remote and receiver

Match code:

ID learning Receiver 1. Short press the ID learning button on the receiver, the running light keeps on.



Clear code:



CV Power Supply

5~24Vdc

Receive

White Warm White Strip

5~24Vdc Receive White Warm White Strip

CV Power Supply

Attention:

- · Please replace the battery if the remote becomes insensitive or control distance is shortened.
- · Please take out the battery for long time unused.

www.ltech-led.com